



1000-SK/II LOW TEMPERATURE SMOKER OVEN



- HALO HEAT . . . a controlled, uniform heat source that maintains close temperature tolerances throughout the cooking and holding function. Offers uniform and consistent cooking on a daily basis, low shrinkage of bulk or portion-cut protein items, higher food moisture content, and significantly longer holding life.
- Smokes with real wood chips — no pressure cooking, no artificial smoke flavor.
- Smoke timer offers a choice of mild, medium, or heavy smoke flavor.
- Cooks, smokes, and holds meats, poultry, and fish.
- Cold smokes fish and cheese.
- Induces natural enzyme action in meat for tenderizing.
- Less energy usage than conventional ovens.
- Reduces labor and evens-out work loads.
- Stackable design for additional capacity.
- Simple control senses temperature drops faster, providing quick heat recovery time.

Single compartment smoker with 20 gauge stainless steel exterior. Door includes a magnetic door latch. Oven interior includes two (2) completely removable, non-magnetic stainless steel side racks with eleven (11) pan positions spaced on 1-3/8" (35mm) centers, two (2) stainless steel wire shelves, one (1) stainless steel Rib Rack, a removable stainless steel drip pan with drain and a wood chip container. Oven is furnished with an exterior, front mounted stainless steel drip tray and one (1) sample bag each of cherry, hickory, apple & maple wood chips. Oven includes one (1) set of 3-1/2" (89mm) casters — 2 rigid, and 2 swivel with brake.

Smoker is controlled by one (1) Simple control with an ON/OFF power switch; cook temperature knob, 200° to 325°F (94° to 160°C); hold temperature knob, 60° to 205°F (16° to 96°C); digital display, UP/DOWN arrows to set cook and hold time; and a sixty minute smoking timer. Control features indicator lights for the cook, hold, and smoke functions, and when the oven is calling for heat. Oven is equipped with a voltage conversion switch, located on the back of the oven, for voltage selection (208 or 240 V.A.C.) at time of installation.

MODEL 1000-SK/II: Low temperature smoker oven with Simple control.




IP X3

FACTORY INSTALLED OPTIONS

- Specify Door:
 - Solid Door, standard
 - Window Door, optional
- Specify Door Swing:
 - Right-hand swing, standard
 - Left-hand swing, optional
- Specify Voltage:
 - 208-240
 - 230
- Specify exterior panel color:
 - Stainless steel, standard
 - Burgundy, optional
 - Custom, optional
- Cooking thermostat limit set at 250°F for restricted areas of the U.S.A.
 - Specify on order as required.

ADDITIONAL FEATURES

- **Rib Rack Shelf • Item SH-29474**
Special non-magnetic stainless steel wire shelf designed to hold ribs or fish in an upright position for more even smoking. Each shelf will hold thirteen full ribs. One (1) Rib Rack Shelf is furnished with each smoker. Additional racks are available as an option. Total oven capacity: Three (3) Rib Rack Shelves.
- **Stackable Design**
1000-SK/II can be stacked with an identical oven, 1000-SK/III, 1000-TH/III Cook & Hold oven or 1000-S Holding Cabinet. Order appropriate stacking hardware.



Lifetime Warranty

On all Cook & Hold heating elements (EXCLUDES LABOR).




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA


FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com



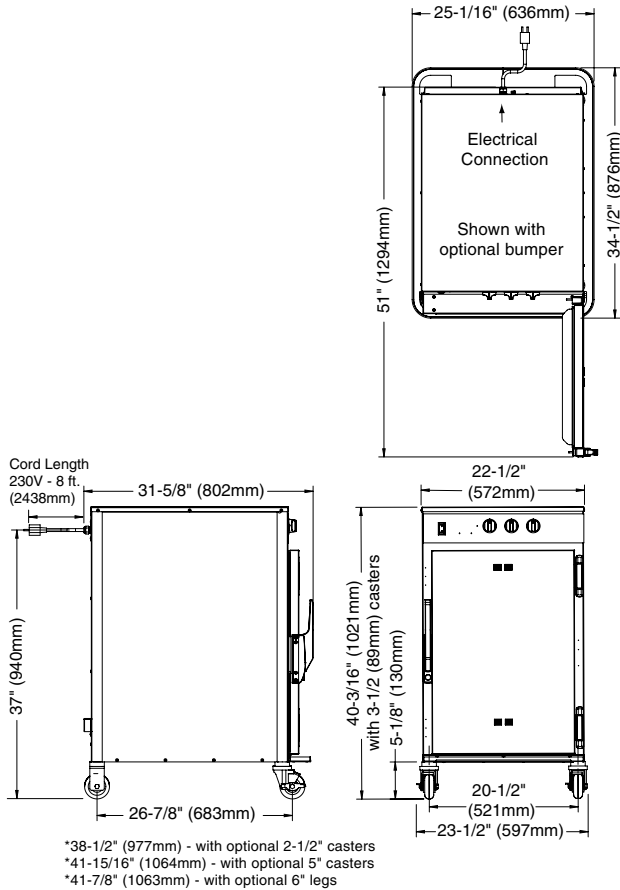

DIMENSIONS: H x W x D	
EXTERIOR:	40-3/16" x 22-1/2" x 31-5/8" (1021mm x 572mm x 802mm)
INTERIOR:	26-7/8" x 18-7/8" x 26-1/2" (683mm x 479mm x 673mm)

ELECTRICAL					
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG
208-240 (AGCY)	1	60	15.7	3.3	NO CORD
at 208	1	60	15.3	3.2	OR PLUG
at 240	1	60	12.1	2.9	
230	1	50/60	12.2	2.8	 CEE 7/7 220-230V PLUG

PRODUCT/PAN CAPACITY	
120 lbs (54kg) MAXIMUM	
VOLUME MAXIMUM: 60 QUARTS (76 LITERS)	
Three (3)	FULL-SIZE PANS: 20" x 12" x 2-1/2" ON OPTIONAL WIRE SHELVES ONLY
	GASTRONORM 1/1: 530mm x 325mm x 65mm
Seven (7)	FULL-SIZE SHEET PANS: 18" x 26" x 1"

CLEARANCE REQUIREMENTS	
BACK	3" (76mm)
TOP	2" (51mm)
EACH SIDE	1" (25mm)
WEIGHT	
NET: 203 lb (92 kg) EST.	SHIP: 282 lb (101 kg) EST.
CARTON DIMENSIONS: (L x W x H)	
35" x 35" x 50" (889mm x 889mm x 1270mm)	

INSTALLATION REQUIREMENTS
<ul style="list-style-type: none"> — Oven must be installed level. — The oven must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions. — Appliances with casters and no cord or plug must be secured to the building structure with a flexible connector. NOT FACTORY SUPPLIED.

OPTIONS & ACCESSORIES	
<input type="checkbox"/> Bumper, Full Perimeter (NOT AVAILABLE WITH 2-1/2" CASTERS)	5009767
<input type="checkbox"/> Carving Holder, Prime Rib	HL-2635
<input type="checkbox"/> Carving Holder, Steamship (Cafeteria) Round	4459
Casters, Stem - 2 RIGID, 2 SWIVEL W/BRAKE	
<input type="checkbox"/> 2-1/2" (64mm)	5008022
<input type="checkbox"/> Door Lock with Key	LK-22567
<input type="checkbox"/> Drip Pan with Drain, 1-7/8" (48mm deep)	5005616
<input type="checkbox"/> Drip Pan without Drain 1-7/8" (48mm deep)	11906
<input type="checkbox"/> Drip Pan, 4" deep	15929

<input type="checkbox"/> Legs, 6" (152mm), Flanged (SET OF FOUR)	5011149
<input type="checkbox"/> Pan Grid, Wire — 18" x 26" PAN INSERT	PN-2115
<input type="checkbox"/> Security Panel w/ Key Lock	5013934
<input type="checkbox"/> Shelf, Stainless Steel, Flat Wire	SH-2325
<input type="checkbox"/> Shelf, Stainless Steel, Rib Rack	SH-29474
<input type="checkbox"/> Stacking Hardware	5004864
Wood Chips bulk pack - 20 lb (9 kg)	
<input type="checkbox"/> Apple	WC-22543
<input type="checkbox"/> Cherry	WC-22541
<input type="checkbox"/> Hickory	WC-2829
<input type="checkbox"/> Maple	WC-22545